

How to setup the Futaba 4PX to work with I-KILLY kill switch



On the I-KILLY go to setting and set the kill switch to work with the 3rd or 4th channel radio
ie. $R = 3C$




Then set the Receiving Signal to Reverse ie. $S = R$



Now plug the kill switch to channel 4 (or 3)



Now assign PS1(or PS2 or PS3) to channel 4 (or 3) as a control button

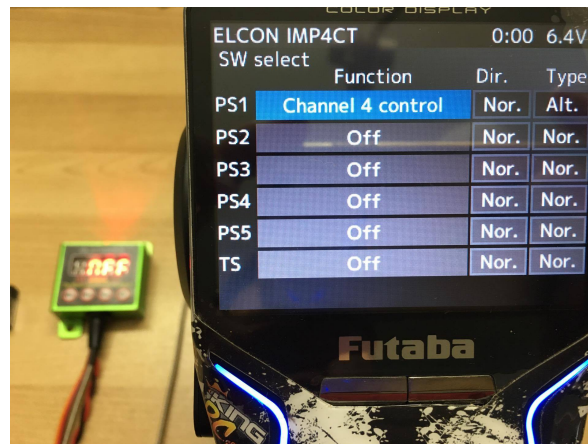


The PS1 button is located under the steering wheel



In the Ch.Reverse menu set Ch.4 to Normal



In the failsafe menu set the Ch.4 to OFF

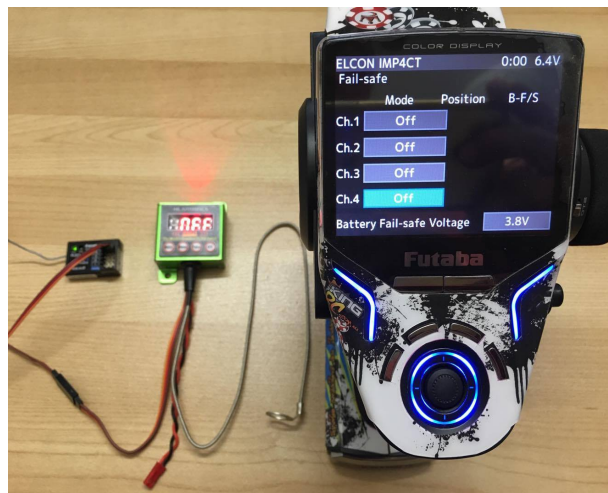

In the End Point menu. On Ch.4 set the Left to 40 and the Right to 140

